


REV	DATE	DESCRIPTION	DRAWN

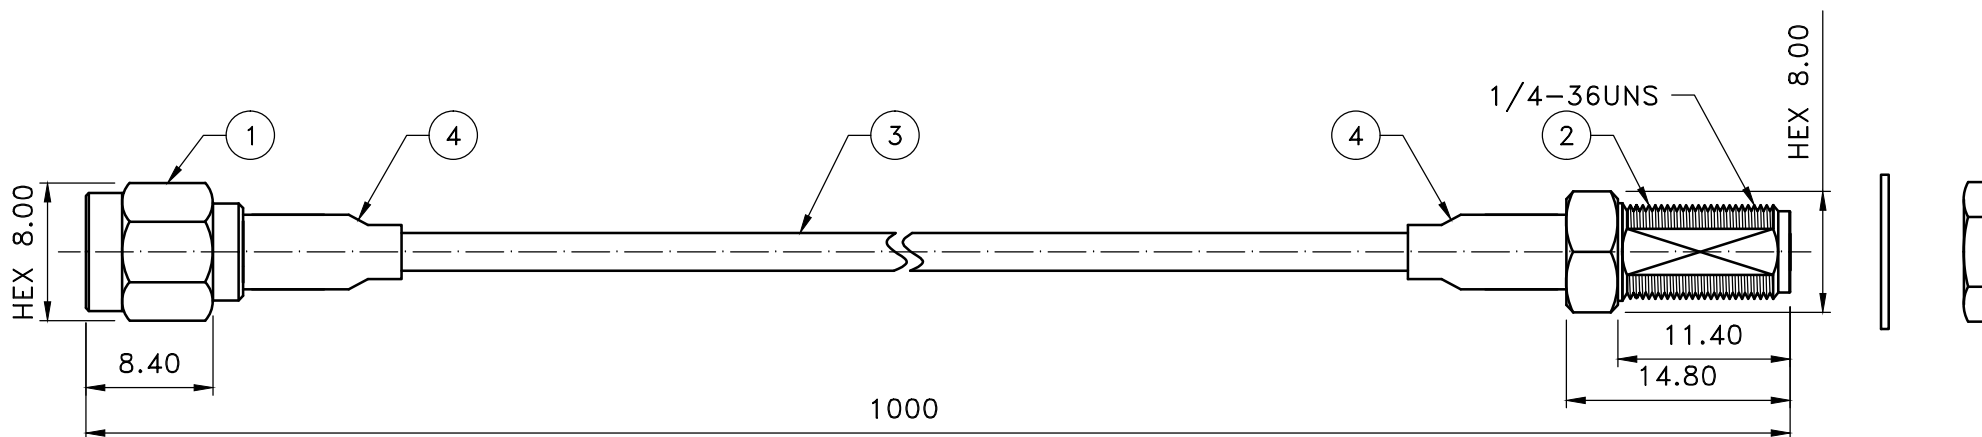

NOTE:

- SMA MALE CRIMP**
CENTER PIN GOLD PLATING 20 μ THICK OVER NICKEL STRIKE
BODY GOLD PLATING 3 μ THICK OVER NICKEL STRIKE
BRASS PER SGS
PTFE : TOMBO No.9002
FINISH PLATING THICKNESS IN MICRO-INCHES
COPPER PARTS AUTOMATIC CNC MANUFACTURING
- SMA FEMALE BULKHEAD CRIMP**
CENTER PIN GOLD PLATING 20 μ THICK OVER NICKEL STRIKE
BODY GOLD PLATING 3 μ THICK OVER NICKEL STRIKE
BRASS AND BERYLLIUM COPPER PER SGS
PTFE : TOMBO No.9002
FINISH PLATING THICKNESS IN MICRO-INCHES
COPPER PARTS AUTOMATIC CNC MANUFACTURING
- LOW LOSS 100 COAXIAL CABLE**
ATTENUATION : 0.75dB/m@900MHz 1.09dB/m@1800MHz 1.31dB/m@2500MHz
CONDUCTOR : COPPER COATED STEEL WIRE/Ø0.46mm
INSULATION : SOLID PE/Ø1.52mm
TAPE : BONDED ALUMINUM FOIL
SHIELD : TINNED COPPER WARE/16*5*0.10mm/95% COVERAGE
JACKET : PVC/Ø2.79mm

RECOMMENDED MOUNTING HOLE

Prohibit re-circulating



4	D0269 (SHRINK TUBE)	PE	BLACK	2
3	LLC100	ASSY	BLACK	1
2	SMA-1012-51-L-TGG	BRASS	GOLD	1
1	SMA-1001-4-L-TGG	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'ty

NOTE	DIMENSION	TITLE	
1. STRIP ALL BURRS. 2. ALL DIMENSIONS ARE AFTER PLATING. 3. DIAMETERS ON COMMON CENTERS. TO BE CONCENTRIC WITHIN 0.1 T.I.R 4. CHAMFER 1ST & LAST THREADS 45° 5. BREAK ALL CONNERS & EDGES CO.15 MAX.	UNLESS OTHERWISE NOTED TOLERANCES 0.X=±0.2 0.XX=±0.1 CABLE LENGTH: L ≥ 10000 = ± 50 1000 ≤ L < 10000 = ± 30 L < 1000 = ± 8	DRAWING NO. 10014100101251-A1000	
		APPROVED	DRAWN DATE 05/26/21
		CHECKED	SCALE 2:1
		DRAWN JASON	UNIT mm

All creative content and details belonging to HYT's confidential, and the owner, without consent, Do not posted, theft, copied and sent to a third party.