


| REV | DATE | DESCRIPTION | DRAWN |
|-----|------|-------------|-------|
| | | | |
| | | | |

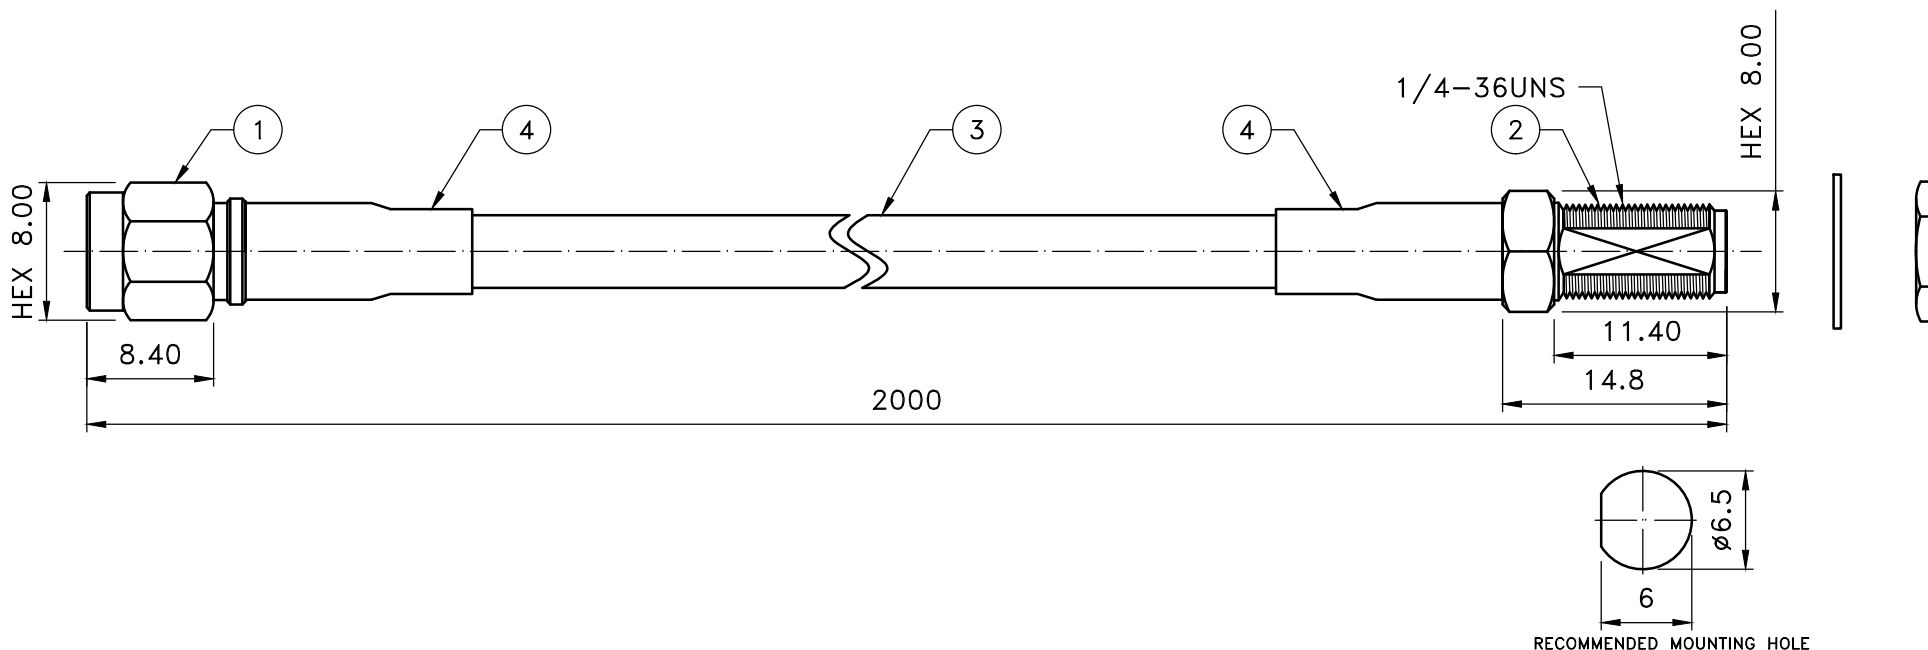

NOTE:

- SMA MALE CRIMP**
 CENTER PIN GOLD PLATING 20 μ THICK OVER NICKEL STRIKE
 BODY GOLD PLATING 3 μ THICK OVER NICKEL STRIKE
 BRASS AND PTFE PER SGS
 PTFE : TOMBO No.9002
 FINISH PLATING THICKNESS IN MICRO-INCHES
 COPPER PARTS AUTOMATIC CNC MANUFACTURING
- SMA FEMALE BULKHEAD CRIMP**
 CENTER PIN GOLD PLATING 20 μ THICK OVER NICKEL STRIKE
 BODY GOLD PLATING 3 μ THICK OVER NICKEL STRIKE
 BRASS AND PTFE PER SGS
 PTFE : TOMBO No.9002
 FINISH PLATING THICKNESS IN MICRO-INCHES
 COPPER PARTS AUTOMATIC CNC MANUFACTURING
- LOW LOSS 200A COAXIAL CABLE/3D**
 ATTENUATION : 0.32dB/m@900MHZ 0.42dB/m@1800MHZ 0.61dB/m@3000MHZ
 CONDUCTOR : BARE COPPER WIRE/Ø1.12mm
 INSULATION : GAS-FPE/Ø2.95mm
 TAPE : BONDED ALUMINUM FOIL
 SHIELD : TINNED COPPER WARE/16*4*0.10mm/59% COVERAGE
 JACKET : PVC/Ø4.95mm

Prohibit re-circulating



| 4 | D0176 (SHRINK TUBE) | PE | BLACK | 2 |
|----|---------------------|----------|--------|------|
| 3 | LLC200A | ASSY | BLACK | 1 |
| 2 | SMA-1012-33-F2-TGG | BRASS | GOLD | 1 |
| 1 | SMA-1001-8-F2-TGG | BRASS | GOLD | 1 |
| NO | DESCRIPTION | MATERIAL | FINISH | Q'ty |

| NOTE | | DIMENSION | |
|---|--|---|--|
| 1. STRIP ALL BURRS. 2. ALL DIMENSIONS ARE AFTER PLATING. 3. DIAMETERS ON COMMON CENTERS. TO BE CONCENTRIC WITHIN 0.1 T.I.R 4. CHAMFER 1ST & LAST THREADS 45° 5. BREAK ALL CONNERS & EDGES CO.15 MAX. | | UNLESS OTHERWISE NOTED TOLERANCES 0.X=±0.2 0.XX=±0.1 CABLE LENGTH: L ≥ 10000 = +50 1000 ≤ L < 10000 = +30 L < 1000 = +8 | |
| DRAWING NO. 10018A200101233-A2000 | | DRAWN DATE 05/26/21 | |
| APPROVED | | SCALE 2:1 | |
| CHECKED | | UNIT mm | |
| DRAWN JASON | | | |

All creative content and details belonging to HYT's confidential, and the owner, without consent, Do not posted, theft, copied and sent to a third party.