


REV	DATE	DESCRIPTION	DRAWN

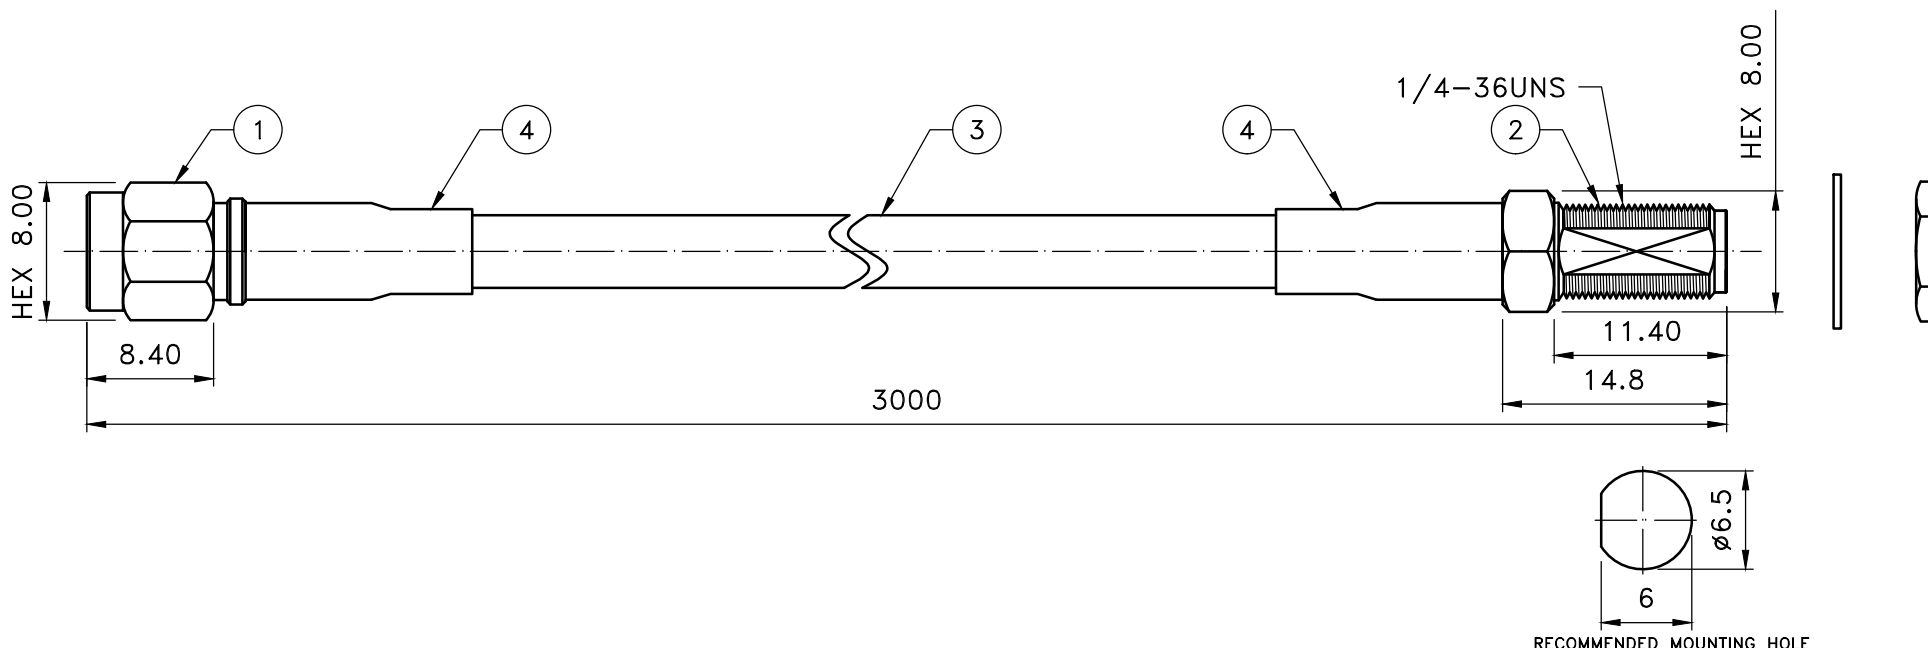

**NOTE:**

- SMA MALE CRIMP**  
 CENTER PIN GOLD PLATING 20 $\mu$  THICK OVER NICKEL STRIKE  
 BODY GOLD PLATING 3 $\mu$  THICK OVER NICKEL STRIKE  
 BRASS AND PTFE PER SGS  
 PTFE : TOMBO No.9002  
 FINISH PLATING THICKNESS IN MICRO-INCHES  
 COPPER PARTS AUTOMATIC CNC MANUFACTURING
- SMA FEMALE BULKHEAD CRIMP**  
 CENTER PIN GOLD PLATING 20 $\mu$  THICK OVER NICKEL STRIKE  
 BODY GOLD PLATING 3 $\mu$  THICK OVER NICKEL STRIKE  
 BRASS AND PTFE PER SGS  
 PTFE : TOMBO No.9002  
 FINISH PLATING THICKNESS IN MICRO-INCHES  
 COPPER PARTS AUTOMATIC CNC MANUFACTURING
- LOW LOSS 200A COAXIAL CABLE/3D**  
 ATTENUATION : 0.32dB/m@900MHZ 0.42dB/m@1800MHZ 0.61dB/m@3000MHZ  
 CONDUCTOR : BARE COPPER WIRE/Ø1.12mm  
 INSULATION : GAS-FPE/Ø2.95mm  
 TAPE : BONDED ALUMINUM FOIL  
 SHIELD : TINNED COPPER WARE/16\*4\*0.10mm/59% COVERAGE  
 JACKET : PVC/Ø4.95mm

**Prohibit re-circulating**



4	D0176 (SHRINK TUBE)	PE	BLACK	2
3	LLC200A	ASSY	BLACK	1
2	SMA-1012-33-F2-TGG	BRASS	GOLD	1
1	SMA-1001-8-F2-TGG	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'ty

NOTE		DIMENSION	
1. STRIP ALL BURRS. 2. ALL DIMENSIONS ARE AFTER PLATING. 3. DIAMETERS ON COMMON CENTERS. TO BE CONCENTRIC WITHIN 0.1 T.I.R 4. CHAMFER 1ST & LAST THREADS 45° 5. BREAK ALL CONNERS & EDGES CO.15 MAX.		UNLESS OTHERWISE NOTED TOLERANCES 0.X=±0.2 0.XX=±0.1 CABLE LENGTH: L ≥ 10000 = +50 1000 ≤ L < 10000 = +30 L < 1000 = +8	
DRAWING NO. 10018A200101233-A3000		APPROVED	DRAWN DATE 05/26/21
CHECKED		SCALE 2:1	
DRAWN JASON		UNIT mm	

\*All creative content and details belonging to HYT's confidential, and the owner, without consent, Do not posted, theft, copied and sent to a third party.\*