


REV	DATE	DESCRIPTION	DRAWN

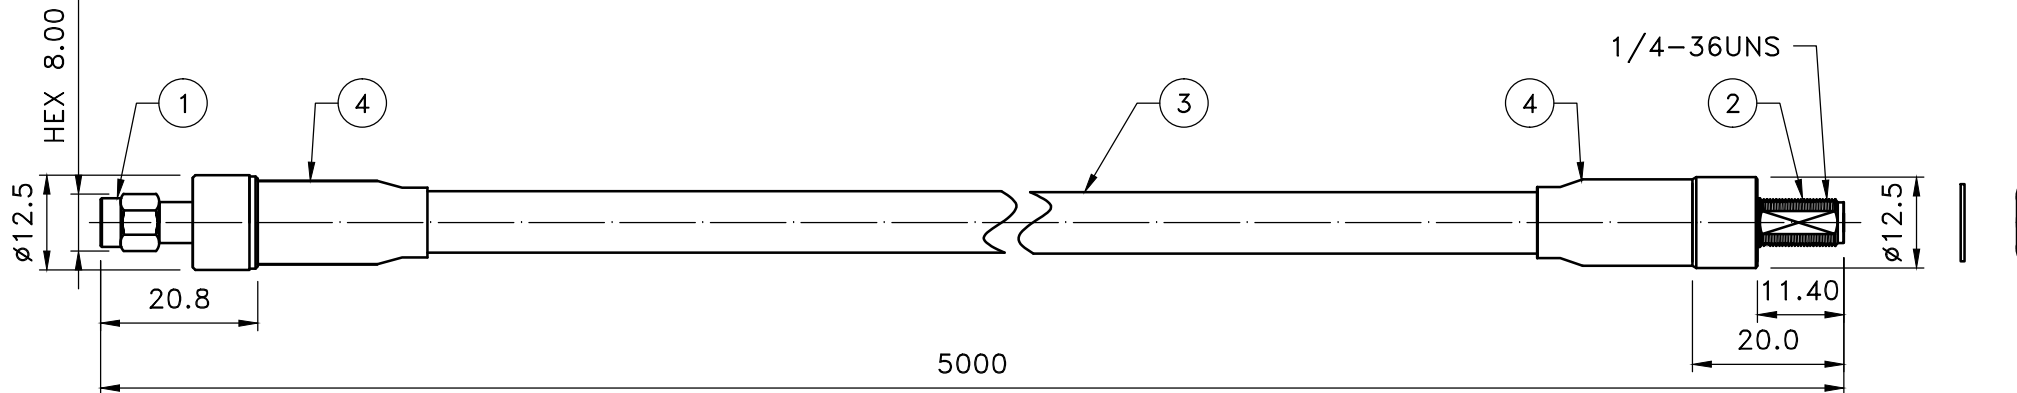

NOTE:

- SMA MALE CRIMP**
 CENTER PIN GOLD PLATING 15 μ THICK OVER NICKEL STRIKE
 BODY NICKEL PLATING 80 μ THICK OVER NICKEL STRIKE
 BRASS AND PTFE PER SGS
 PTFE : TOMBO No.9002
 FINISH PLATING THICKNESS IN MICRO-INCHES
 COPPER PARTS AUTOMATIC CNC MANUFACTURING
- SMA FEMALE BULKHEAD CRIMP**
 CENTER PIN GOLD PLATING 20 μ THICK OVER NICKEL STRIKE
 BODY GOLD PLATING 3 μ THICK OVER NICKEL STRIKE
 BRASS PER SGS
 PTFE : TOMBO No.9002
 FINISH PLATING THICKNESS IN MICRO-INCHES
 COPPER PARTS AUTOMATIC CNC MANUFACTURING
- LOW LOSS 400A COAXIAL CABLE/8D**
 ATTENUATION : 0.061dB/ft@1575MHz 0.086dB/ft@3000MHz 0.125dB/ft@6000MHz
 CONDUCTOR : COPPER CLAD ALUMINIUM/Ø2.74mm
 INSULATION : GAS-FPE/Ø7.24mm
 TAPE : BONDED ALUMINIUM FOIL
 SHIELD : TINNED COPPER WARE/16*6*0.12mm/67% COVERAGE
 JACKET : PE/Ø10.29mm

Prohibit re-circulating



4	DO087 (SHRINK TUBE)	PE	BLACK	2
3	LLC400A	ASSY	BLACK	1
2	SMA-1012-39-B4-TGG	BRASS	GOLD	1
1	SMA-1001-11-B4-TGN	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'ty

NOTE	DIMENSION
1. STRIP ALL BURRS.	UNLESS OTHERWISE NOTED TOLERANCES 0.X=±0.2 0.XX=±0.1 CABLE LENGTH: L ≥ 10000 = ± 50 1000 ≤ L < 10000 = ± 30 L < 1000 = ± 8
2. ALL DIMENSIONS ARE AFTER PLATING.	
3. DIAMETERS ON COMMON CENTERS.	
4. CHAMFER 1ST & LAST THREADS 45°.	
5. BREAK ALL CONNERS & EDGES CO.15 MAX.	

TITLE SMA1001-SMA1012	
DRAWING NO. 100111A400101239-A5000	
APPROVED	DRAWN DATE 05/26/21
CHECKED	SCALE 1:1
DRAWN JASON	UNIT mm

All creative content and details belonging to HYT's confidential, and the owner, without consent, Do not posted, theft, copied and sent to a third party.