


REV	DATE	DESCRIPTION	DRAWN

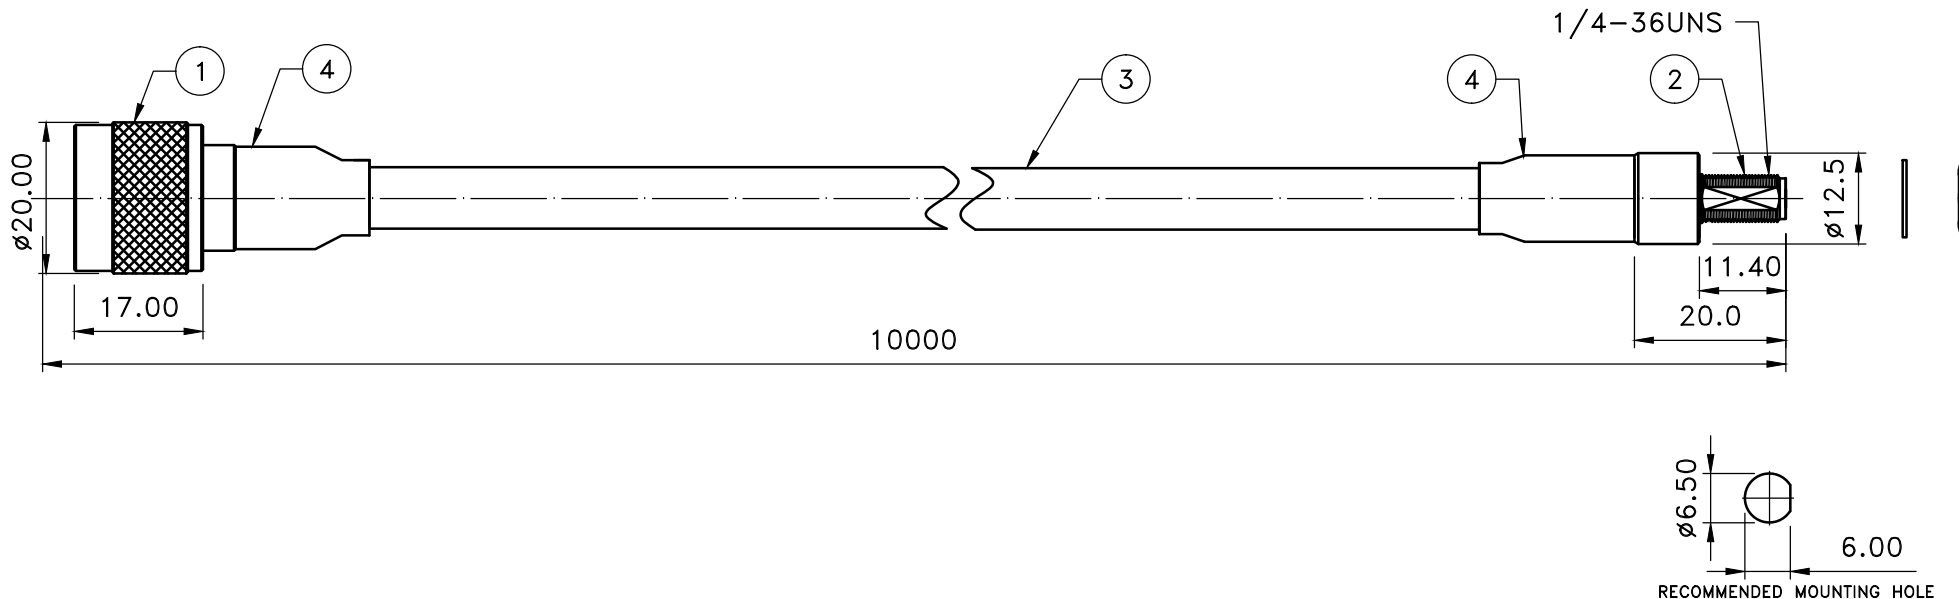

**NOTE:**

- 1.N MALE  
 CENTER PIN GOLD PLATING 3μ THICK OVER NICKEL STRIKE  
 BODY NICKEL PLATING 70μ THICK OVER NICKEL STRIKE  
 BRASS AND PTFE PER SGS  
 FINISH PLATING THICKNESS IN MICRO-INCHES  
 COPPER PARTS AUTOMATIC CNC MANUFACTURING
- 2.SMA FEMALE BULKHEAD CRIMP  
 CENTER PIN GOLD PLATING 20μ THICK OVER NICKEL STRIKE  
 BODY GOLD PLATING 3μ THICK OVER NICKEL STRIKE  
 BRASS PER SGS  
 PTFE : TOMBO No.9002  
 FINISH PLATING THICKNESS IN MICRO-INCHES  
 COPPER PARTS AUTOMATIC CNC MANUFACTURING
- 3.LOW LOSS 400A COAXIAL CABLE/8D  
 ATTENUATION : 0.061dB/ft@1575MHZ 0.086dB/ft@3000MHZ 0.125dB/ft@6000MHZ  
 CONDUCTOR : COPPER CLAD ALUMINIUM/Ø2.74mm  
 INSULATION : GAS-FPE/Ø7.24mm  
 TAPE : BONDED ALUMINUM FOIL  
 SHIELD : TINNED COPPER WARE/16\*6\*0.12mm/67% COVERAGE  
 JACKET : PE/Ø10.29mm

Prohibit re-circulating



NO	DESCRIPTION	MATERIAL	FINISH	Q'ty
4	D0087 (SHRINK TUBE)	PE	BLACK	2
3	LLC400A	ASSY	BLACK	1
2	SMA-1012-39-B4-TGG	BRASS	GOLD	1
1	N-1101-7-B4-TGN	BRASS	NICKEL	1

NOTE	DIMENSION
1.STRIP ALL BURRS. 2.ALL DIMENSIONS ARE AFTER PLATING. 3.DIAMETERS ON COMMON CENTERS. 4.CHAMFER 1ST & LAST THREADS 45°. 5.BREAK ALL CONNERS & EDGES CO.15 MAX.	UNLESS OTHERWISE NOTED TOLERANCES 0.X=±0.2 0.XX=±0.1 CABLE LENGTH: L ≥ 10000 = $\pm_{-0}^{+50}$ 1000 ≤ L < 10000 = $\pm_{-0}^{+30}$ L < 1000 = $\pm_{-0}^{+8}$

TITLE <b>N1101-SMA1012</b>	
DRAWING NO. <b>11017A400101239-A10000</b>	
APPROVED	DRAWN DATE <b>05/26/21</b>
CHECKED	SCALE <b>1:1</b>
DRAWN <b>JASON</b>	UNIT <b>mm</b>

\*All creative content and details belonging to HYT's confidential, and the owner, without consent, Do not posted, theft, copied and sent to a third party.\*