


REV	DATE	DESCRIPTION	DRAWN

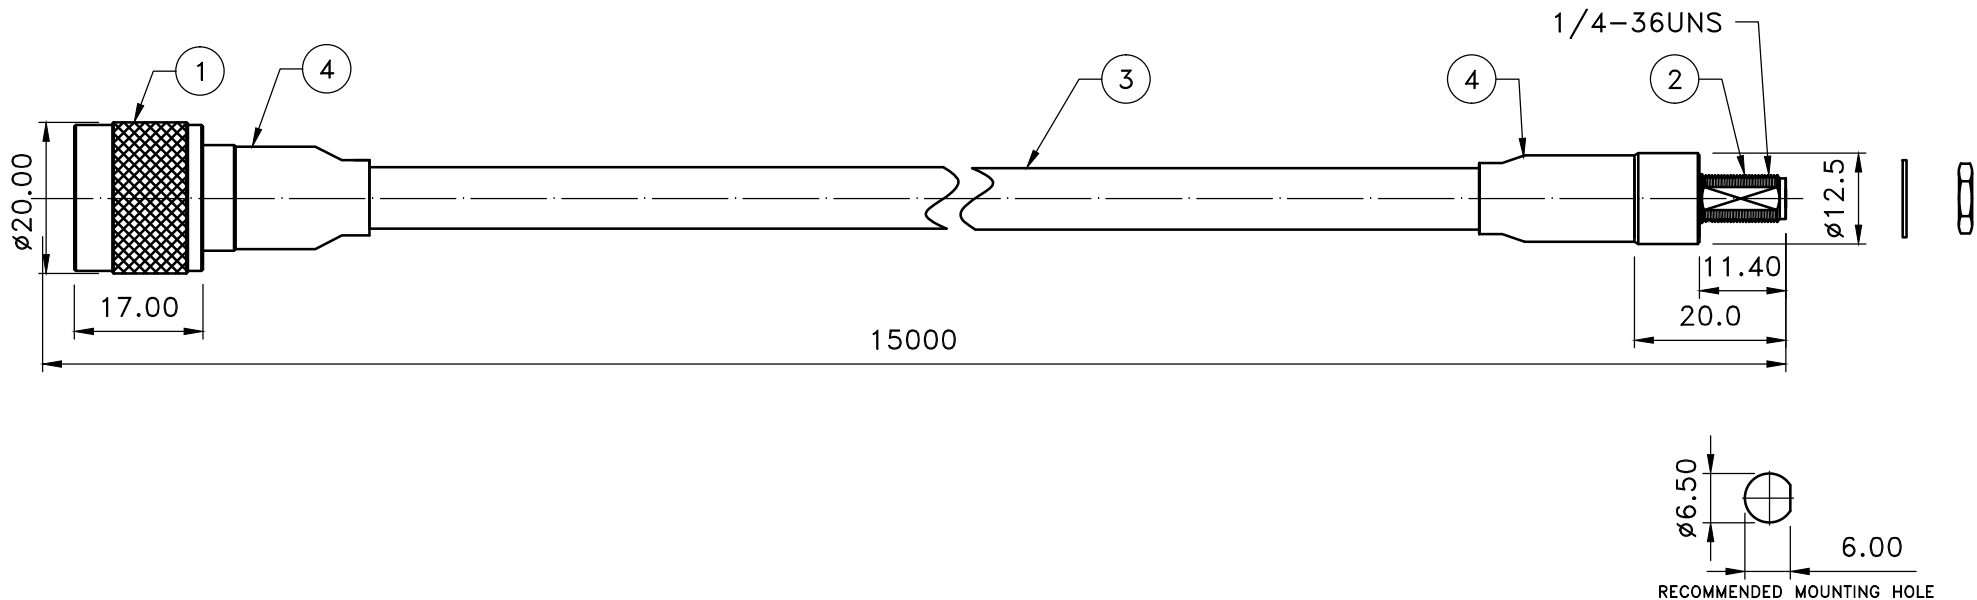

NOTE:

- 1.N MALE
CENTER PIN GOLD PLATING 3μ THICK OVER NICKEL STRIKE
BODY NICKEL PLATING 70μ THICK OVER NICKEL STRIKE
BRASS AND PTFE PER SGS
FINISH PLATING THICKNESS IN MICRO-INCHES
COPPER PARTS AUTOMATIC CNC MANUFACTURING
- 2.SMA FEMALE BULKHEAD CRIMP
CENTER PIN GOLD PLATING 20μ THICK OVER NICKEL STRIKE
BODY GOLD PLATING 3μ THICK OVER NICKEL STRIKE
BRASS PER SGS
PTFE : TOMBO No.9002
FINISH PLATING THICKNESS IN MICRO-INCHES
COPPER PARTS AUTOMATIC CNC MANUFACTURING
- 3.LOW LOSS 400A COAXIAL CABLE/8D
ATTENUATION : 0.061dB/ft@1575MHz 0.086dB/ft@3000MHz 0.125dB/ft@6000MHz
CONDUCTOR : COPPER CLAD ALUMINIUM/Ø2.74mm
INSULATION : GAS-FPE/Ø7.24mm
TAPE : BONDED ALUMINUM FOIL
SHIELD : TINNED COPPER WARE/16*6*0.12mm/67% COVERAGE
JACKET : PE/Ø10.29mm

Prohibit re-circulating



NO	DESCRIPTION	MATERIAL	FINISH	Q'ty
4	D0087 (SHRINK TUBE)	PE	BLACK	2
3	LLC400A	ASSY	BLACK	1
2	SMA-1012-39-B4-TGG	BRASS	GOLD	1
1	N-1101-7-B4-TGN	BRASS	NICKEL	1

NOTE	DIMENSION
1.STRIP ALL BURRS. 2.ALL DIMENSIONS ARE AFTER PLATING. 3.DIAMETERS ON COMMON CENTERS. 4.CHAMFER 1ST & LAST THREADS 45°. 5.BREAK ALL CONNERS & EDGES CO.15 MAX.	UNLESS OTHERWISE NOTED TOLERANCES 0.X=±0.2 0.XX=±0.1 CABLE LENGTH: L ≥ 10000 = \pm_{0}^{+50} 1000 ≤ L < 10000 = \pm_{0}^{+30} L < 1000 = \pm_{0}^{+8}

TITLE	
N1101-SMA1012	
DRAWING NO.	
11017A400101239-A15000	
APPROVED	DRAWN DATE
	05/26/21
CHECKED	SCALE
	1:1
DRAWN	UNIT
JASON	mm

All creative content and details belonging to HYT's confidential, and the owner, without consent, Do not posted, theft, copied and sent to a third party.