


REV	DATE	DESCRIPTION	DRAWN

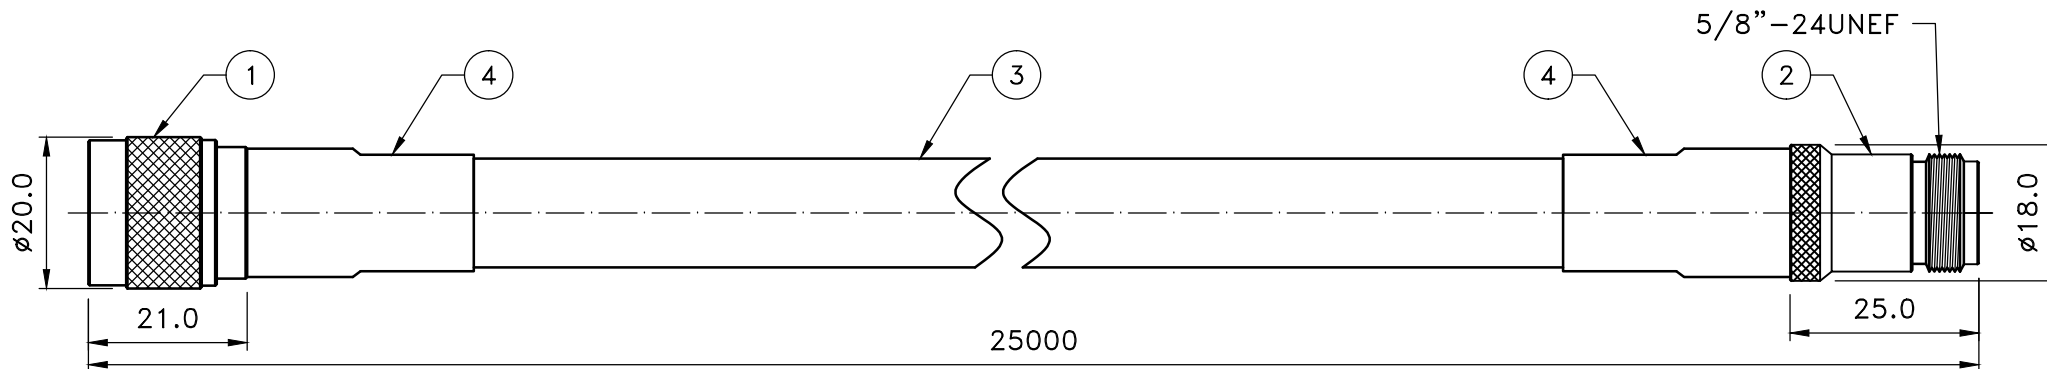

NOTE:

1.N MALE CRIMP
 CENTER PIN GOLD PLATING 3 μ THICK OVER NICKEL STRIKE
 BODY NICKEL PLATING 70 μ THICK OVER NICKEL STRIKE
 BRASS AND PTFE PER SGS
 FINISH PLATING THICKNESS IN MICRO-INCHES
 COPPER PARTS AUTOMATIC CNC MANUFACTURING

2.N FEMALE CRIMP
 CENTER PIN GOLD PLATING 3 μ THICK OVER NICKEL STRIKE
 BODY NICKEL PLATING 70 μ THICK OVER NICKEL STRIKE
 BRASS AND PTFE PER SGS
 FINISH PLATING THICKNESS IN MICRO-INCHES
 COPPER PARTS AUTOMATIC CNC MANUFACTURING

3.CFD600
 ATTENUATION : 0.03dB/ft@1500MHz 0.04dB/ft@2500MHz 0.07dB/ft@5800MHz
 CONDUCTOR : SOLID BCCA1/Ø4.47mm
 INSULATOR : FPE/Ø11.57mm
 TAPE : ALUMINUM/PE
 SHIELD : TINNED COPPER WARE/12.50mm
 JACKET : PE/Ø15.0mm

Prohibit re-circulating



NO	DESCRIPTION	MATERIAL	FINISH	Q'ty
4	D0331 (SHRINK TUBE)	PE	BLACK	2
3	CFD600	ASSY	BLACK	1
2	N-1111-24-V-TGN	BRASS	NICKEL	1
1	N-1101-23-V-TGN	BRASS	NICKEL	1

NOTE	DIMENSION
1.STRIP ALL BURRS. 2.ALL DIMENSIONS ARE AFTER PLATING. 3.DIAMETERS ON COMMON CENTERS. TO BE CONCENTRIC WITHIN 0.1 T.I.R 4.CHAMFER 1ST & LAST THREADS 45° 5.BREAK ALL CONNERS & EDGES CO.15 MAX.	UNLESS OTHERWISE NOTED TOLERANCES 0.X=±0.2 0.XX=±0.1 CABLE LENGTH: L ≥10000=+50 1000≤L<10000=+30 L<1000=+8 -0

TITLE N1101-N1111	
DRAWING NO. 110123CFD60011124-A25000	
APPROVED	DRAWN DATE 05/26/21
CHECKED	SCALE 1:1
DRAWN JASON	UNIT mm

All creative content and details belonging to HYT's confidential, and the owner, without consent, Do not posted, theft, copied and sent to a third party.