




EU POWER SUPPLY 9W

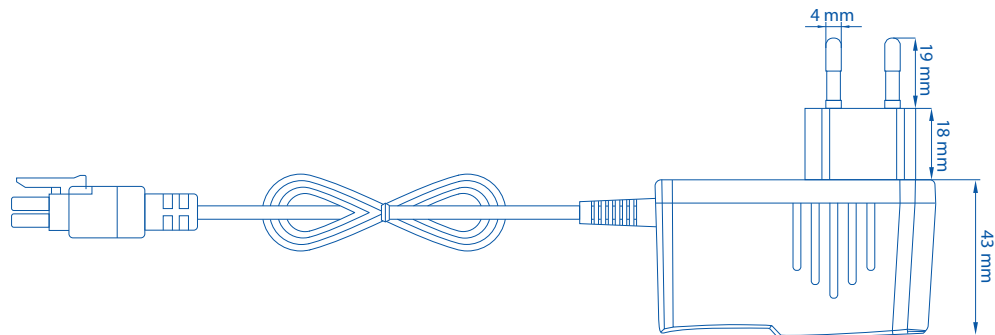

SOFTWARE	RATED VALUE	ABSOLUTE MAXIMUM
Input voltage	100-240 VAC	90-264 VAC
Input Frequency	50/60 Hz	47-63 Hz
Input Current (@100-240 VAC)	0.4 A	-
Inrush Current (@100-240 VAC)	-	40 A
Output Voltage	9 VDC	8.55-9.45 VDC
Output Current	0-1 A	-
Overshoot	5 %	10 %
Certification	EN 60950-1: 2006+A11: 2009+A1: 2010+A12: 2011; EN 55022: 2010, EN 55024: 2010; EN 61000-3-2: 2006+A1: 2009+A2: 2009, EN 61000-3-3: 2008; IEC 62321-7-1:2015, IEC 62321-6:2015, IEC 62321-5:2013, IEC 62321-4:2013, IEC 62321:2008 Annex C.	
Short-Circuit protection	v	
Input protection	Fuse	
HIPOT (Dielectric Withstand Test)	Primary to Secondary: AC3000V	
MTBF	50000 h	
Input connector	EU	
Output connector	4-pin, 3 mm pitch	



4pin, 3 mm pitch connector

